E655

THE NEW ICON OF ESPRESSO GRINDING





E65S | At a glance

KEY FEATURES



- **Proven premium grinding profile** guarantees the optimal particle size
- Modern ground-breaking temperature management system
 cools down the motor continuously
- New pioneering grind adjustment technology to set and keep the perfect degree of fineness
- Innovative icon menu and multifunctional turn- & push-button for easy intuitive operation
- Adjustable and removeable spout for centered espresso grinding into the portafilter
- **Rocksteady portafilter holder and super-robust bean hopper** for ultimate workload resistance
- Slim modern corpus with noise optimization



E65S | Indestructible hopper

Ultimate workload resistance





E65S | Premium espresso grinding profile

Great taste experience

- 65 mm hardened steel burrs with proven burr geometry
- Grind-adjustment for particle size range from 180-580 µm within 80 increments
- Anti-static spout allows the grounds to flow into the portafilter entirely clump free
- Dose deviations of max. 0.4 g at 100 shots straight





E65S | Sensory analysis

COMPARISION: Particle size distribution curves of the E65S



- The E65S got set to following recipe:
 17 g in and 34 g out at 30 sec. extraction time
- The grinder provide optimal particle size profiles for high extraction rates
- The grounds of the E65S provide more uniformity in the particle size (the majority of the particles have a similar size)
- The E65S provides minimal clumping and therefore minimal channelling



E65S | **Pioneering grind adjustment**


Setting and keeping the perfect degree of fineness





E65S | Innovative icon menu and multifunctional turn- & push-button


Easy intuitive operation

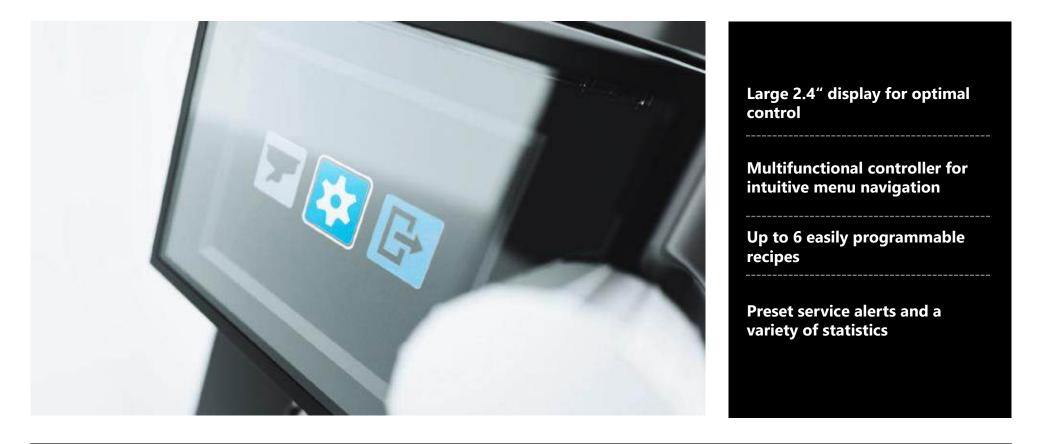



E65S | Adjustable and removable spout

Perfect fit for any portafilter

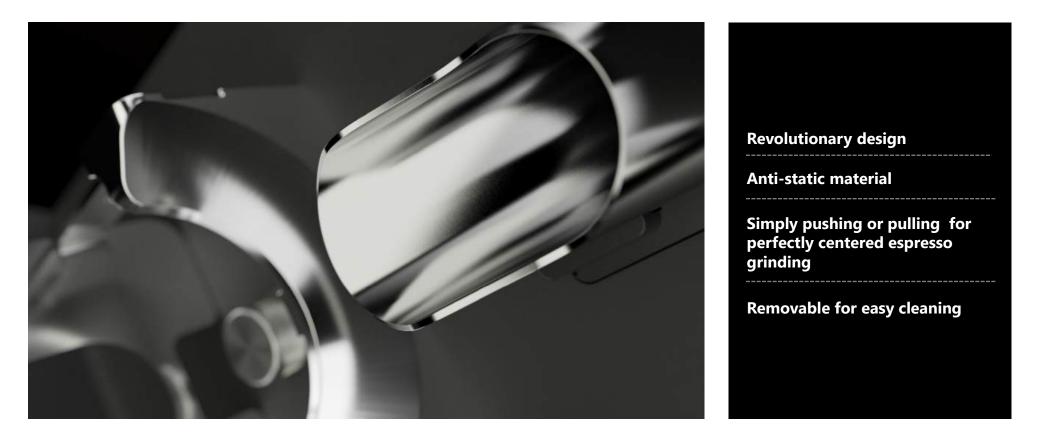



E65S | Rocksteady adjustable portafilter holder

Perfectly adaptable for any portafilter

ditting


Anfim

HEMRO



E65S | Slim modern corpus incorporating noise optimization design

The perfect match for any espresso bar

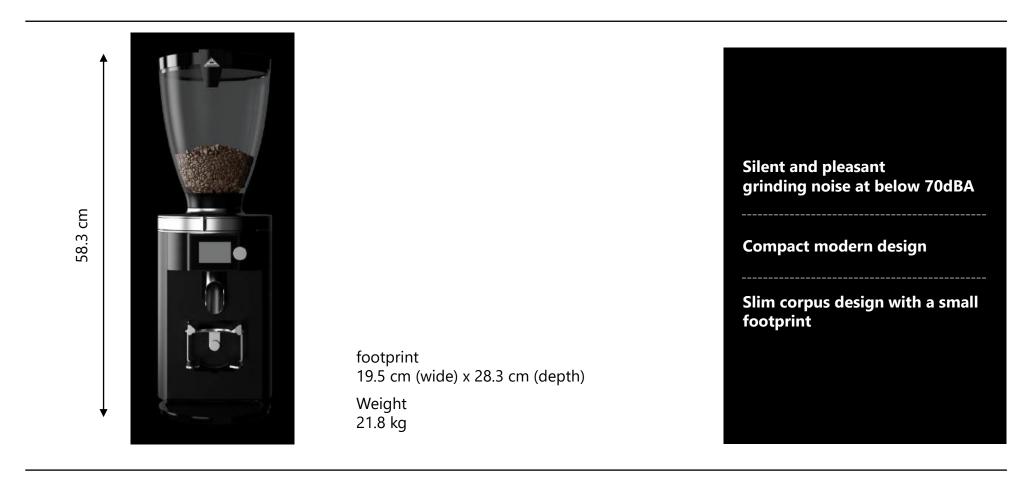



E65S | Easy service and maintenance

Saving valuable resources



- Easy access to the burrs and the built-in grinder, as only 5 screws need to be loosened
- Screws only need to be loosened, meaning no lost screws inside the grinder
- During the burr change, the adjusting ring retains its position and does not have to be readjusted afterwards
- Easy zero setting recalibration via hand wheel



E65S | Technical data

PRODUCT SPECIFICATIONS

Model		E65S	
Color		Stainless steel, matt black / Stainless steel, matt black & white	V
Bean hopper capacity		1.2 kg	
Voltage / Frequency		100 V // 50 Hz // 1~; 100 V // 60 Hz // 1~; 110 - 127 V // 60 Hz // 1~; 220 - 240 V // 50 Hz // 1~; 220 - 240 V // 60 Hz // 1~	
Speed		1400 rpm (50 Hz); 1650 rpm (60 Hz)	
Burrs		Special steel, Ø 65 mm	
Performance	4-7 g/s		
Weight		11.2 kg	
Certifications		CE, CB, ETL Safety, ETL Sanitation	

